




PTVS65CA Transient Voltage Suppressor



Features


- High surge current capability
- Bi-directional TVS
- Glass passivated junction
- Low clamping voltage under surge

Typical Applications

- High power DC bus protection

Mechanical Data

- **Package:** PT01



■ Maximum Ratings (T_a=25°C Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	VALUE
Peak pulse current rating per 8/20μs IEC 61000-4-5	I _{pp}	A	15000
Storage temperature	T _{stg}	°C	-55 ~+125
Junction temperature	T _j	°C	-55 ~+125


■ Electrical Characteristics (T_A=25°C unless otherwise noted)

Part Number (Uni)	Breakdown Voltage V _{BR} @I _T			Maximum Reverse Leakage I _R @V _{RWM} (μA)	Working Peak Reverse Voltage V _{RWM} (V)	Maximum Clamping Voltage V _c @ I _{PP} (V)
	Min (V)	Max (V)	I _T (mA)			
PTVS65CA	70	80	10	1	65	120



PTVS SERIES


■ Outline Dimensions (mm)

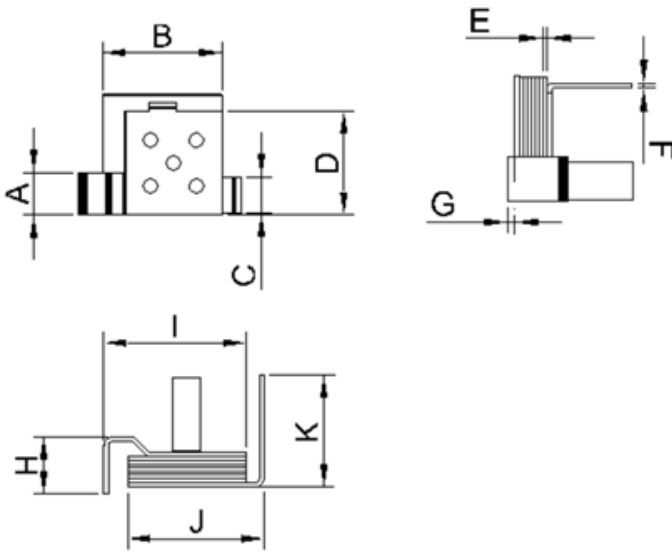

PTVS		
Dim	Min	Max
A	4.50	4.70
B	12.85	13.15
C	3.90	4.10
D	11.15	11.45
E	0.35	0.45
F	0.45	0.55
G	0.72	0.82
H	6.60	6.80
I	15.50	15.70
J	14.90	15.10
K	12.20	12.40

■ Performance Graphs

Current 8/20us Waveform per IEC 6100-4-5

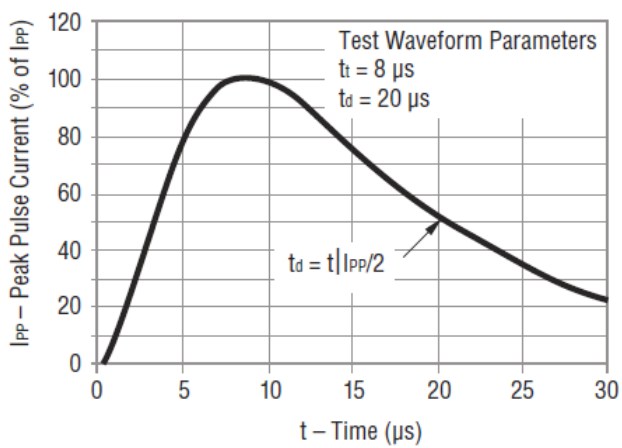



PTVS SERIES

Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.